

QPD2-400-6000-30


2-Way, 0.4~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

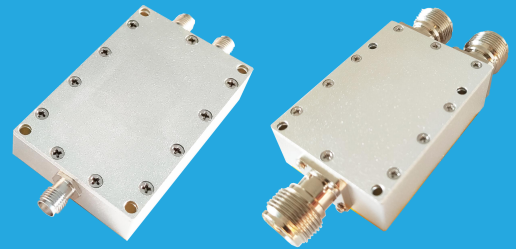

Electrical

Frequency:	0.4~6GHz
Insertion Loss:	1.25dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB max.
Phase Balance:	±2° max.
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical

Size ^{*1} (SMA):	60*38*12mm 2.362*1.496*0.472in
Size ^{*1} (N):	60*42*20mm 2.362*1.654*0.787in
Connectors ^{*2} :	SMA Female N Female TNC Female SMP Male
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

[2] Female connectors can be replaced with male connectors on request.

Environmental

Operation Temperature: -35~+75°C

How To Order

QPD2-400-6000-30-Y

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)

N - N Female (Outline B)

T - TNC Female



P - SMP Male

Examples:

To order a 2-way power divider, 0.4~6GHz, 30W, N female, specify QPD2-400-6000-30-N.

Customization is available upon request.

Outline Drawings

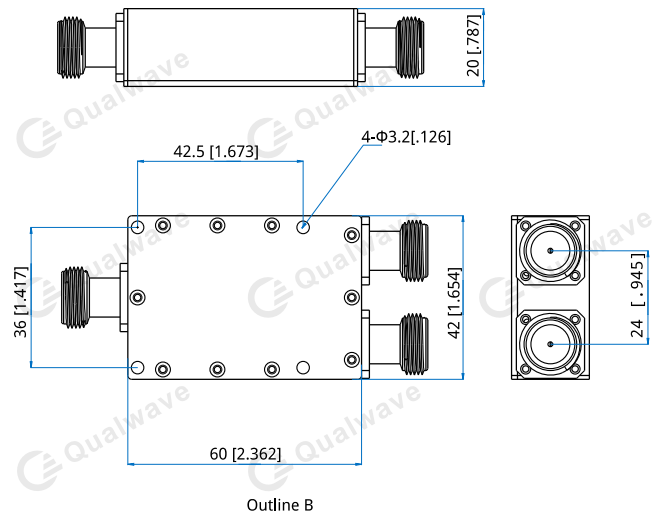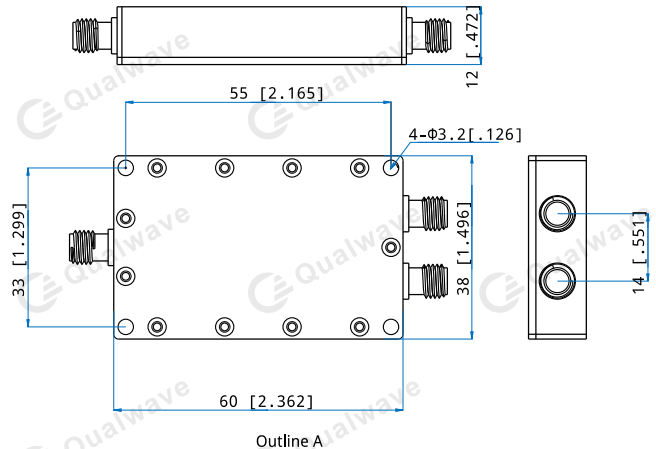


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]


Typical Performance Curves

SMA


Input VSWR vs. Frequency

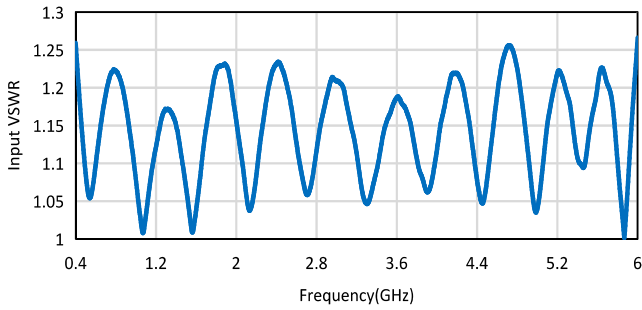


Output VSWR vs. Frequency

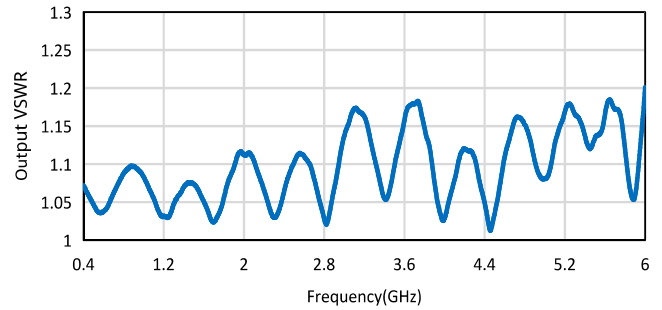


Insertion Loss vs. Frequency

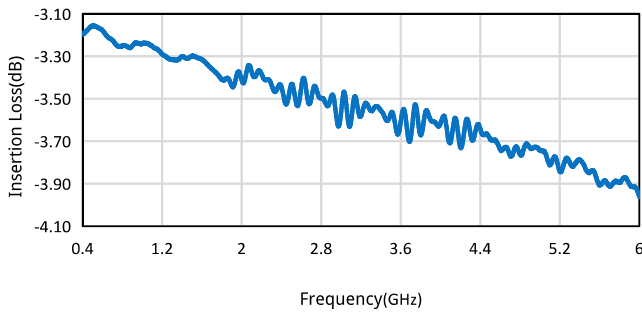


Isolation vs. Frequency

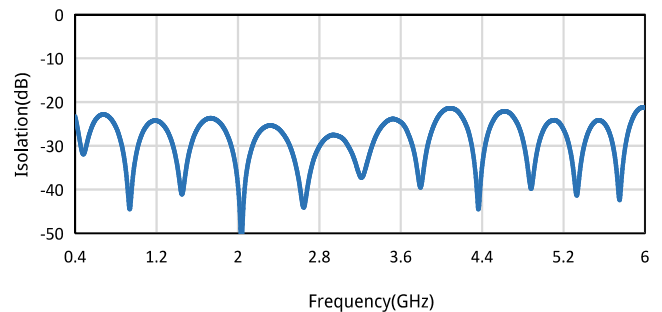

Amplitude Balance vs. Frequency

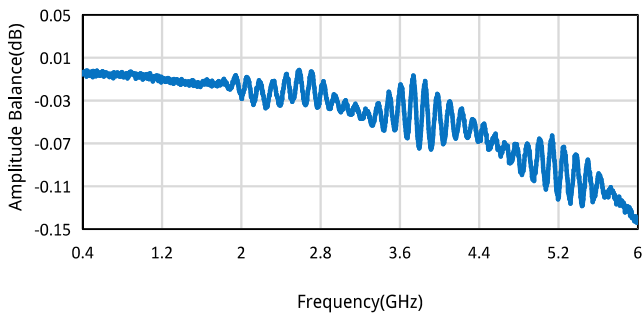


Phase Balance vs. Frequency

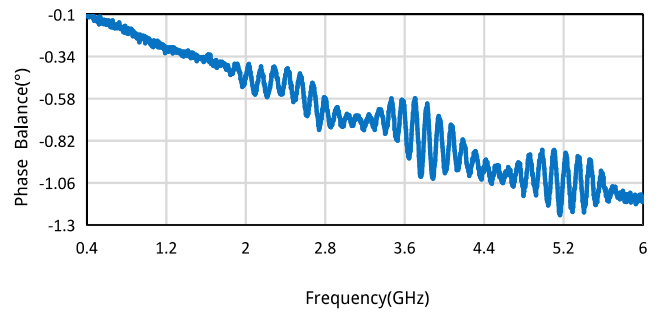


Typical Performance Curves

N

Input VSWR vs. Frequency

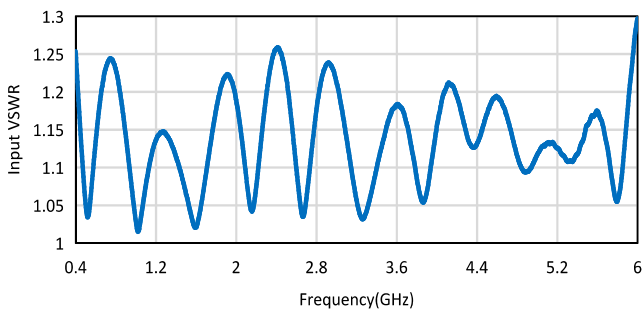


Output VSWR vs. Frequency

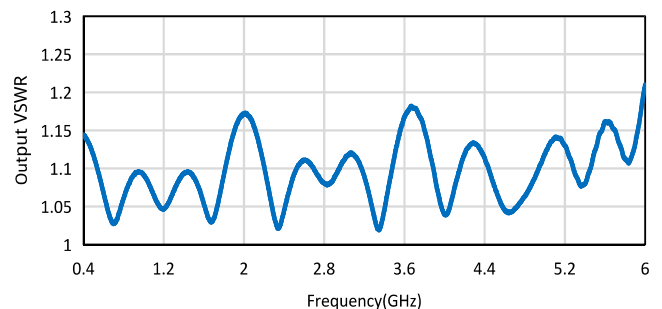


2-Way Power Dividers/Combiners


Insertion Loss vs. Frequency

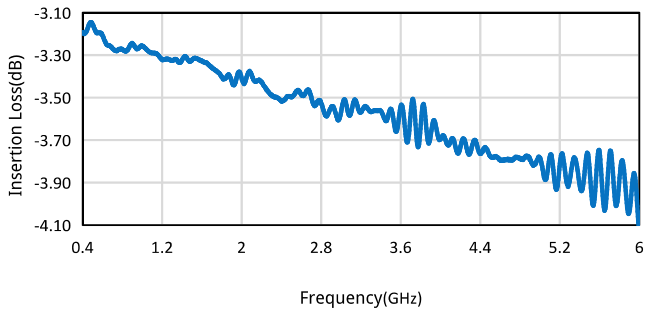

Isolation vs. Frequency

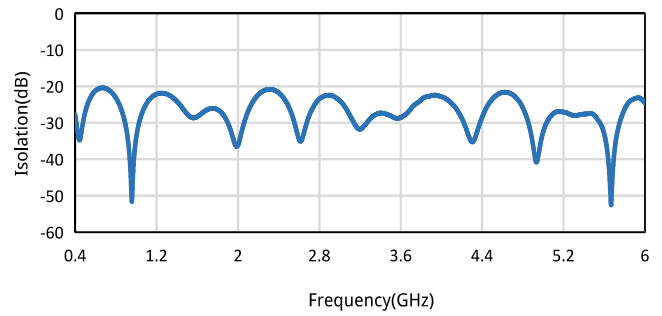

Amplitude Balance vs. Frequency

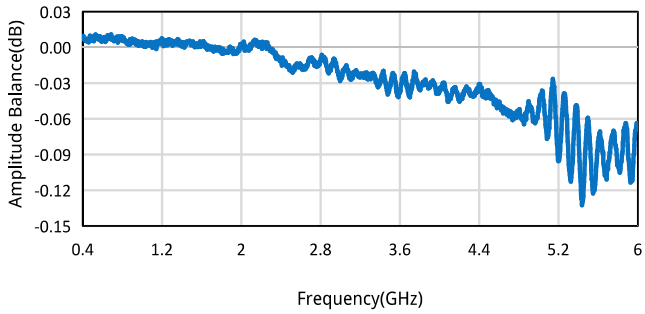

Phase Balance vs. Frequency

