

QPD12-240-30-S

12-Way, 240MHz

Features:

- * Broadband
- * Low Insertion Loss
- * High Power

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	240MHz
Insertion Loss:	0.8dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.5dB max.
Phase Balance:	±4°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

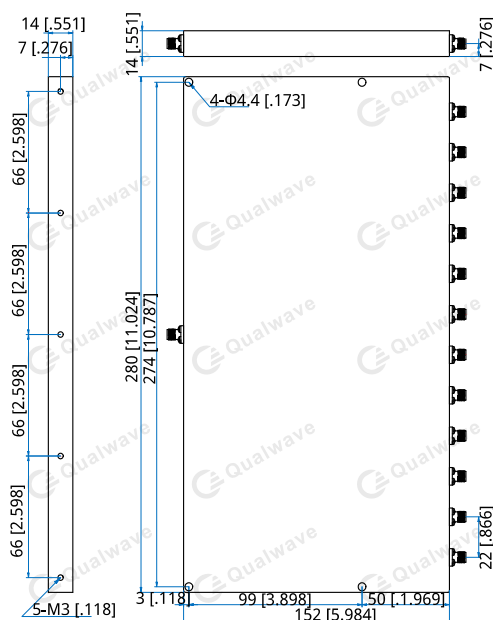
Mechanical

Size ^{*1} :	280*152*14mm 11.024*5.984*0.551in
Connectors:	SMA Female
Mounting:	4-Φ4.4mm through-hole 5-M3

[1] Exclude connectors.

Environmental

Operation Temperature: -35~+75°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD12-240-30-S

Customization is available upon request.