

# QA830

## Ultra Low Loss & Phase Stable

- |   |   |
|---|---|
| <b>Features:</b><br>* Low Insertion Loss<br>* High Phase Stability<br>* High Power<br>* Low PIM | <b>Applications:</b><br>* Phased-array Radar<br>* Satellite Communication<br>* Avionics |
|---|---|

### Electrical

Frequency:	DC~18GHz
Cut-off Frequency:	18GHz
Impedance:	50Ω
Velocity of Propagation:	83%
Shielding Effectiveness:	90dB min.
Voltage Withstand:	2500V DC
PIM:	-155dBc
Phase Stability:	750PPM@-55°C~+85°C max.


### Mechanical

Bend Radius (installation):	41.0mm
Bend Radius (repeated):	83.0mm
Weight:	162g/m

### Environmental

Temperature: -55~+165°C

### Construction

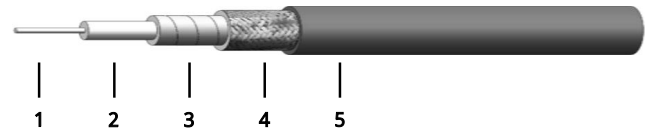

No.	Name	Size (mm)	Material
1	Inner Conductor	2.44	Silver-plated copper
2	Dielectric	6.50	Low density PTFE
3	Inner Shield	6.90	Silver-plated copper tape
4	Outer Shield	7.65	Silver-plated copper braid
5	Jacket	8.30	PFA

### Attenuation & Power Handling

Frequency (GHz)	1	2	4	6	8	10	12.4	16	18
Attenuation*1 (dB/100m)	13.3	18.9	27.1	33.6	39.1	44.1	49.5	56.9	60.6
Average Power*2 (W)	1894	1326	925	747	641	569	507	442	414

[1] VSWR:1.0; Ambient: +25°C (77°F)

[2] VSWR:1.0; Ambient: +40°C (104°F); Sea level

Calculate Cable Attenuation: Attenuation (dB/100m) = 0.408997 \* √F (MHz) + 0.000320 \* F (MHz)

Calculate Connector Attenuation: Attenuation (dB) = 0.03 \* √F (GHz)

### How To Order

#### QA830-X-Y-Z

X: Frequency in GHz

Y: Connector type

Z: Length in meters

#### Examples:

To order a QA830 cable assembly, DC-18GHz, N male to SMA female, 0.5 meter, specify QA830-18-SFN-0.5.

#### Connector naming rules:

S - SMA (18GHz, VSWR 1.3)

N - N (18GHz, VSWR 1.3)

T - TNC (18GHz, VSWR 1.3)

L1 - L16 (18GHz, VSWR 1.3)

Female Connector - Add 'F' after connector name

Right Angle - Add 'R' after connector name (VSWR increase 0.1)