

# QPD16-6000-18000-20-S

## 16-Way, 6~18GHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

### Electrical

Frequency:	6~18GHz
Insertion Loss:	1.8dB max.
Input VSWR:	1.5max.
Output VSWR:	1.5 max.
Isolation:	17dB min.
Amplitude Balance:	±0.8dB
Phase Balance:	±8°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

### Mechanical


Size <sup>*1</sup> :	50*224*10mm 1.969*8.819*0.394in
Connectors:	SMA Female
Mounting:	4-Φ4.4mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

### Outline Drawings

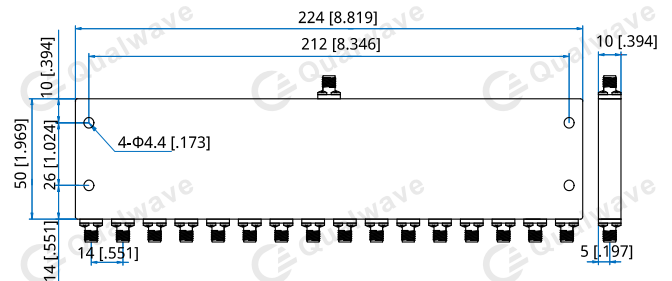

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**QPD16-6000-18000-20-S**

Customization is available upon request.