

QPD8-40000-67000-12-V

8-Way, 40~67GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	40~67GHz
Insertion Loss:	5.9dB max.
Input VSWR:	1.9 max.
Output VSWR:	1.9 max.
Isolation:	16dB min.
Amplitude Balance:	±1dB max.
Phase Balance:	±12° max.
Impedance:	50Ω
Power @SUM Port:	12W max. as divider 1W max. as combiner

Mechanical


Size* ¹ :	103.7*30*12.7mm 4.083*1.181*0.5in
Connectors:	1.85mm Female
Mounting:	4-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

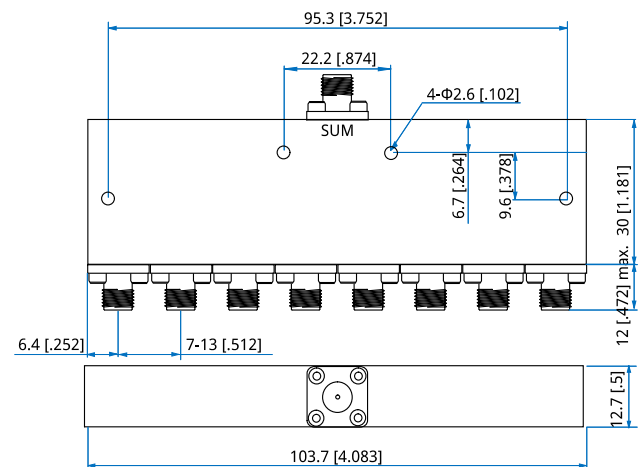

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD8-40000-67000-12-V

Customization is available upon request.