

QHC8-60-120-1-S

0.06~0.12GHz, 1W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.06~0.12GHz
Insertion Loss:	0.6dB max.
VSWR:	1.3 max.
Isolation:	15dB min.
Amplitude Balance:	±1dB max.
Phase Balance:	180±5°
Average Power:	1W max.
Impedance:	50Ω

Mechanical


Size*1:	31.75*31.75*19.05mm 1.25*1.25*0.75in
Connectors:	SMA Female
Mounting:	2-Φ3.45mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

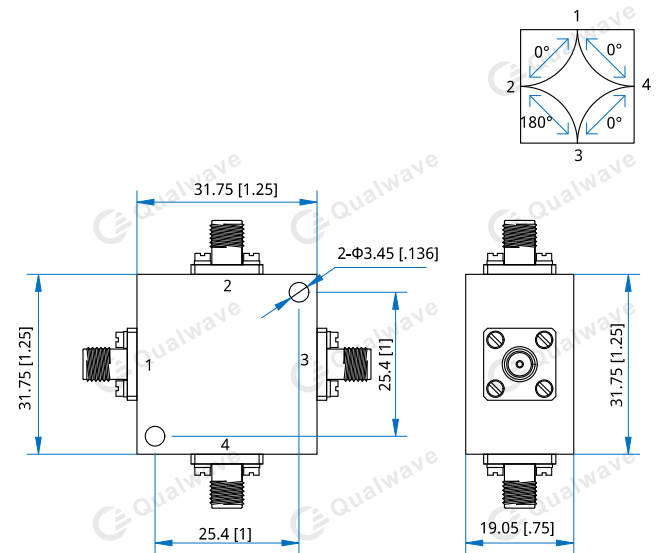

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QHC8-60-120-1-S

Customization is available upon request.