

QPD2-0-26500-2

DC~26.5GHz, 2W

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	DC~26.5GHz
Amplitude Balance:	±0.4dB
Phase Balance:	±3°
Power @SUM Port:	2W as divider
Impedance:	50Ω

Model	Insertion Loss*1 (dB max.)	Input VSWR (max.)	Output VSWR (max.)	Isolation (dB min.)
QPD2-0-26500-2-S	1.5	1.5	2.5	9
QPD2-0-26500-2-S-1	1.5	1.5	1.5	5.5

[1] Excluding theoretical loss 15dB.

Mechanical


Size*2:	15.8*15.8*8mm 0.622*0.622*0.315in
Connectors:	SMA Female
Mounting:	4-Φ1.7mm through-hole

[2] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
Non-operating Temperature:	-55~+100°C

Outline Drawings

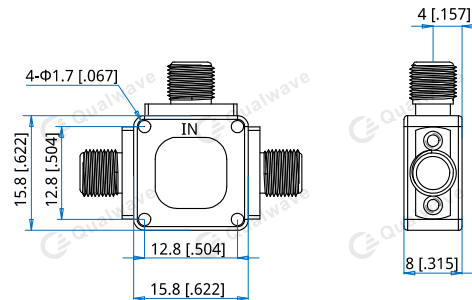

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD2-0-26500-2-X

X: Connector type

Connector naming rules:

S - SMA Female, Consists of two 50Ω resistors

S-1 - SMA Female, Consists of three 16 2/3Ω resistors

Examples:

To order a 2-way power divider, 0~26.5GHz, 2W, SMA female, Consists of two 50Ω resistors, specify QPD2-0-26500-2-S.

Customization is available upon request.