

QDDCC-3940-5990

3.94~5.99GHz

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	3.94~5.99GHz
Coupling:	50±1.5dB
VSWR (Mainline):	1.1 max.
VSWR (Coupline):	1.3 max.
Directivity:	18dB min.
Power Handling:	1.52MW

Mechanical

Interface:	WR-187 (BJ48)
Flange:	FDP48
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Black paint

Environmental

Operating Temperature: -40~+125°C

How To Order

QDDCC-3940-5990-W-X-Y-Z

W: Coupling:

50 - Outline A

X: Coupling Connector type

Y: Material

Z : Flange type

Connector naming rules:

N - N female (Outline A)

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:


2 - FDP (Outline A)

Examples:

To order a Dual Directional Crossguide Coupler, 3.94~5.99GHz, 50dB, N female, Aluminium, FDP48, specify QDDCC-3940-5990-50-N-A-2.

Customization is available upon request.

Outline Drawings

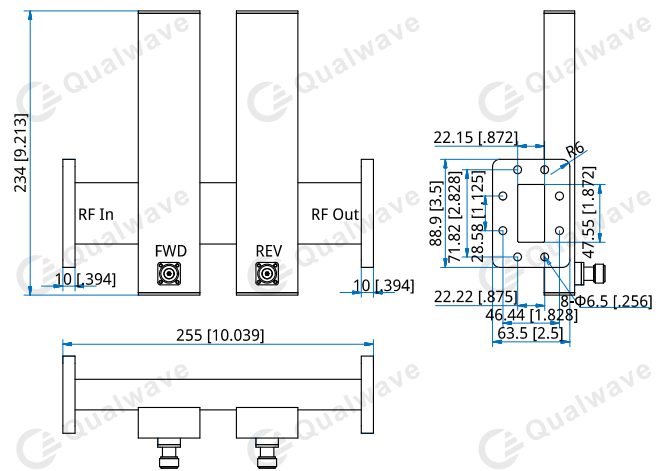

Outline A

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]