


QFA18K3

DC~18GHz, 300W

Features:
 * Low VSWR
 * High Attenuation Flatness

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar



Electrical

Frequency: DC~18GHz
 Attenuation: 3, 6, 10~60dB
 Impedance: 50Ω
 Average Power*1: 300W@25°C max.

[1] Derated linearly to 15W@120°C.

Mechanical

RF Connectors: N Male, N Female


Environmental

Temperature: -55~+125°C


Attenuation Accuracy and VSWR

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)									VSWR (max.)
	3	6	10	20	30	40	50	60		
DC~3	0.5	-	-	-	-	-	-	-	-	1.20
DC~4	-	-	0.7	0.7	0.8	0.9	0.9	0.9	0.9	1.20
DC~6	1	1.2	-	-	-	-	-	-	-	1.25
DC~8	-	-	0.8	0.8	0.9	0.9	0.9	0.9	0.9	1.25
DC~12.4	-	-	3.0	0.9	1.0	1.1	1.1	1.1	1.1	1.35
DC~18	-	-	3.5	-	1.5	1.3	1.3	1.4	1.4	1.45


Outline Drawings

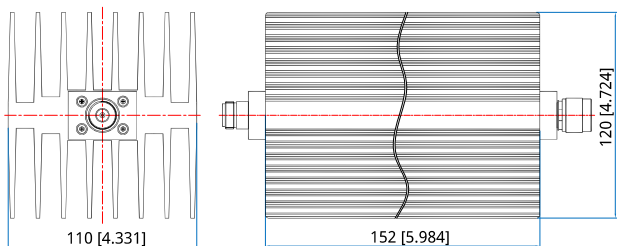

Outline A

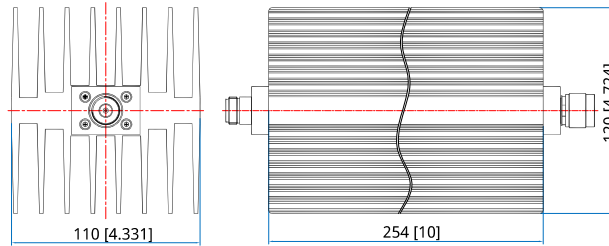

Outline B

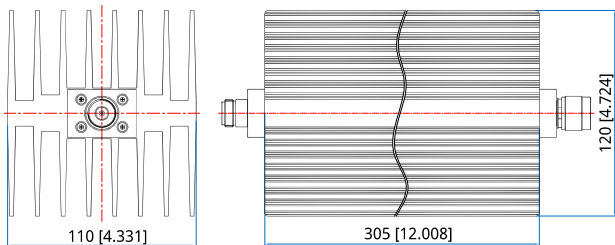

Outline C

Unit: mm [in] Tolerance: ±2mm [±0.08in]

How To Order**QFA18K3-X-Y-Z**

X: Frequency in GHz

Y: Attenuation in dB

3dB, DC~3GHz - Outline A

6dB, DC~6GHz - Outline B

10~60dB, DC~18GHz - Outline C

Z: Connector type

Examples:

To order an attenuator, DC-18GHz, N male to N female, 30dB attenuation, specify QFA18K3-18-30-N.

Connector naming rules:

N - N