

QLA-9K-40000-55-30

9kHz~40GHz, 55dB, 3.0dB

Features:

- * Broadband
- * Low Noise

Applications:

- * Wireless
- * Receiver
- * Laboratory Test
- * Radar



Description

This product series features ultra-wideband low-noise amplifiers (LNAs) operating from 9kHz to 40GHz. The lineup includes:

- LNA modules powered by 5-8V DC, where increasing supply voltage enhances gain and output power;
- LNA systems with integrated switching-mode power supplies (SMPS) accepting 85-265V AC input, recommended for most applications;
- LNA systems employing linear-regulated power supplies for 220V AC operation, delivering optimal performance where extreme power purity is critical.

Electrical

Frequency:	9kHz~40GHz
Gain:	55dB typ.
Gain Flatness:	±5dB typ.
Output Power (P1dB):	11dBm typ. @+5V 15dBm typ. @+8V
Output Power (Psat):	15dBm typ. @+5V 17dBm typ. @+8V
Noise Figure:	3.0dB typ.
Spurious:	-50dBc typ.
VSWR:	2 typ.
Reverse Isolation:	-50dB typ.
Voltage:	+5~+8V DC (Outline A) 85~265V AC (Outline B) 220V AC (Outline C)
Current:	180mA typ. @+5V (Outline A) 350mA typ. @+8V (Outline A)
Impedance:	50Ω

Absolute Maximum Ratings^{*1}

RF Input Power:	+18dBm
Voltage:	+9V (Outline A)

[1] Permanent damage may occur if any of these limits are exceeded.


Mechanical

RF Connectors:	2.92mm Female (Removable)
----------------	---------------------------

Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

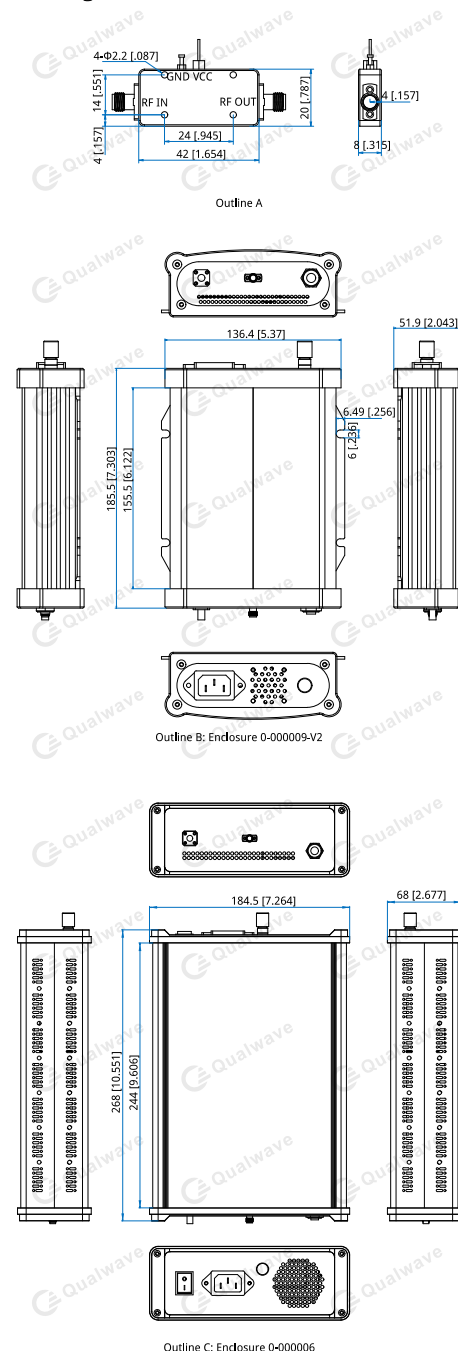

Unit: mm [in] Tolerance: ±0.5mm [±0.02in]

How To Order

[QLA-9K-40000-55-30](#) - Outline A


[QLAS-9K-40000-55-30](#) - Outline B, AC-powered unit integrates a switching-mode power supply.

[QLAS-9K-40000-55-30-1](#) - Outline C, AC-powered unit integrates a linear-regulated power supply.


Customization is available upon request.

Typical Performance Curves


VSWR vs. Frequency

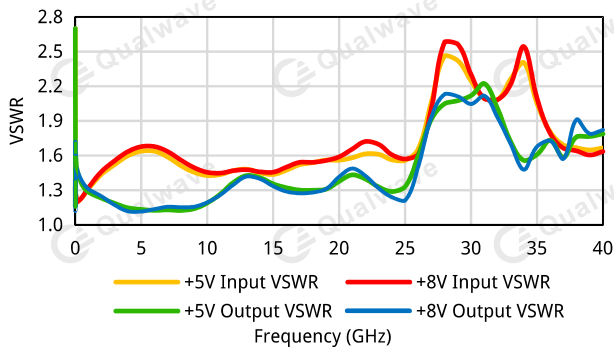


Isolation vs. Frequency

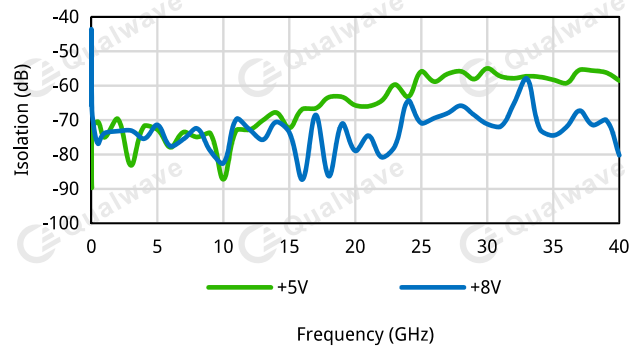


Gain vs. Frequency

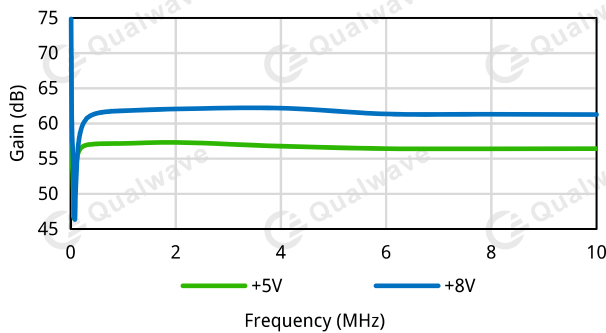

Gain vs. Frequency

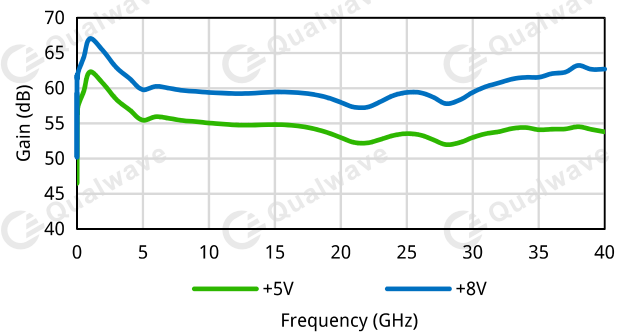

Output Power vs. Frequency

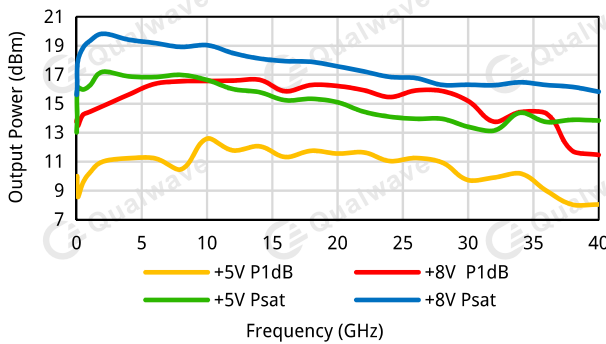

Noise Figure vs. Frequency

