

QRC8-2000-18000-K2-NS

8-Way, 2~18GHz, 200W

Features:
 * Small Size
 * Low Insertion Loss
 * High Reliability

Applications:
 * Radar System
 * Communication System
 * Power Amplifier System
 * Test System

Electrical


Frequency:	2~18GHz
Insertion Loss:	1.0dB max.
VSWR:	1.6 max.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±8° max.
Impedance:	50Ω
Power @SUM Port:	200W as combiner

Mechanical

Size ^{*1} :	81.22*30*30mm 1.575*1.969*0.472in
Connectors:	SMA Female, N Female
Mounting:	8-M2.5 depth 4mm through-hole 3-M2.5 depth 4mm through-hole

[1] Exclude connectors.

Outline Drawings

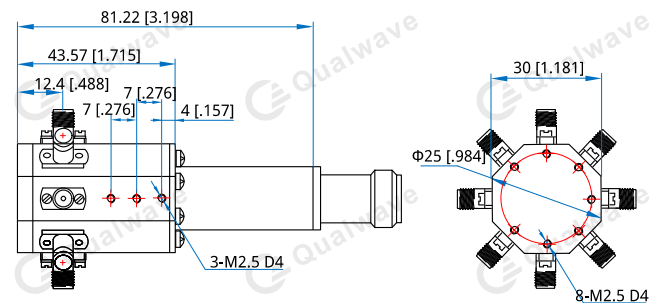

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QRC8-2000-18000-K2-NS

Customization is available upon request.