

QWBF-3625-4200-40

3.625~4.2GHz, 40dB, C-Band

- | | |
|---------------------------|---------------------------|
| Features: | Applications: |
| * High Stopband Rejection | * Telecommunication |
| * Small Size | * Laboratory Test |
| * Light Weight | * Receivers |
| * Anti 5G Interference | * Satellite Earth Station |

Electrical

Input RF Frequency:	3.625~4.2GHz
Passband Insertion Loss:	0.4dB max.
Edge Frequency Insertion Loss:	0.8dB max.
VSWR:	1.35 max.
Stopband Attenuation:	-50dB@3.4GHz
	-60dB@3.5GHz
	-45dB@3.55~3.6GHz
	-40dB@3.6GHz
	-45dB@4.3GHz
	-65dB@4.5~4.9GHz
Impedance:	50Ω

Environmental

Operating Temperature:	-40~+60°C
Non-Operating Temperature:	-40~+80°C

How To Order

QWBF-3700-4200-45-X-Y-Z

- X : Connector type
 Y : Material
 Z : Flange type

Connector naming rules:
 229 - WR-229

Material naming rules:
 A - Aluminium

Flange naming rules:
 2 - FDP
 4 - FDM

Examples:
 To order a Waveguide Band Pass Filter, 3.625~4.2GHz, 40dB, WR-229, Aluminium, FDM40 to FDP40, specify QWBF-3625-4200-40-229-A-4-2.


Customization is available upon request.

Mechanical

Size*1:	100*98.4*69.9mm 3.937*3.874*2.752in
Input Waveguide:	WR-229 (BJ40) with FDM40 (CPR229-G),
Output Waveguide:	WR-229 (BJ40) with FDP40 (CPR229-F)
Weight:	680g

[1] Exclude connectors.

Outline Drawings

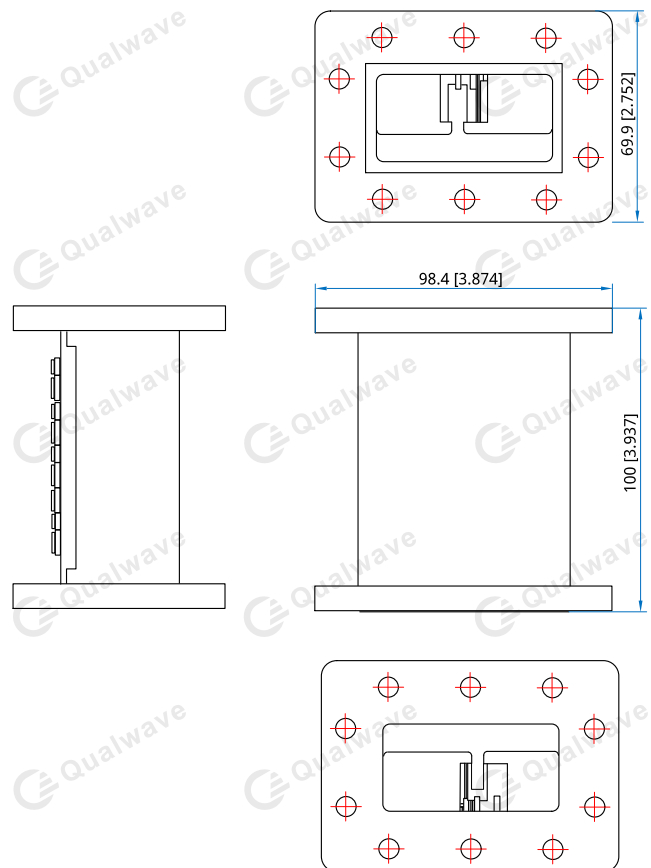

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]