

QPD2-5600-5800-K2-S

2-Way, 5.6~5.8GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

| | |
|--------------------|------------------|
| Frequency: | 5.6~5.8GHz |
| Insertion Loss: | 0.6dB max. |
| VSWR: | 1.4 max. |
| Isolation: | 20dB min. |
| Amplitude Balance: | ±0.3dB max. |
| Phase Balance: | ±3° max. |
| Power @SUM Port: | 200W as combiner |

Mechanical


| | |
|----------------------|-----------------------------------|
| Size ^{*1} : | 90*60*15mm 3.543*2.362*0.591in |
| Connectors: | SMA Female |
| Mounting: | 4-Φ3.3mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|------------------------|-----------|
| Operation Temperature: | -45~+85°C |
|------------------------|-----------|

Outline Drawings

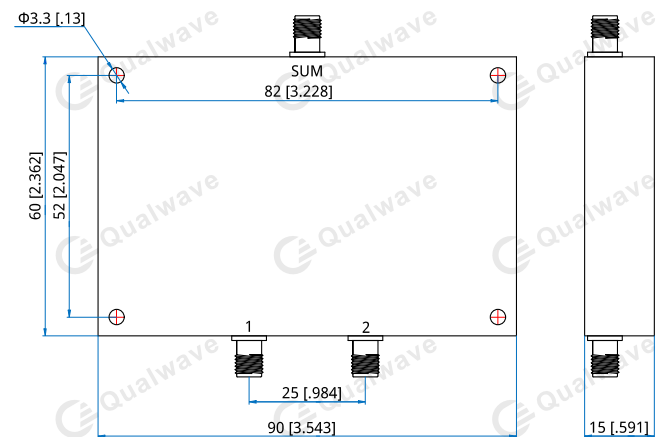

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QPD2-5600-5800-K2-S

Customization is available upon request.