

QPD2-1000-18000-20-S

2-Way, 1~18GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test



Electrical

Frequency:	1~18GHz
Insertion Loss ^{*1} :	1.4dB max.
Input VSWR:	1.4 max.
Output VSWR:	1.4 max.
Isolation:	18dB min.
Amplitude Balance:	±0.3dB
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

[1] Excluding theoretical loss 3dB.

Mechanical


Size ^{*2} :	68.6*30*10mm 2.701*1.181*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.7mm through-hole

[2] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

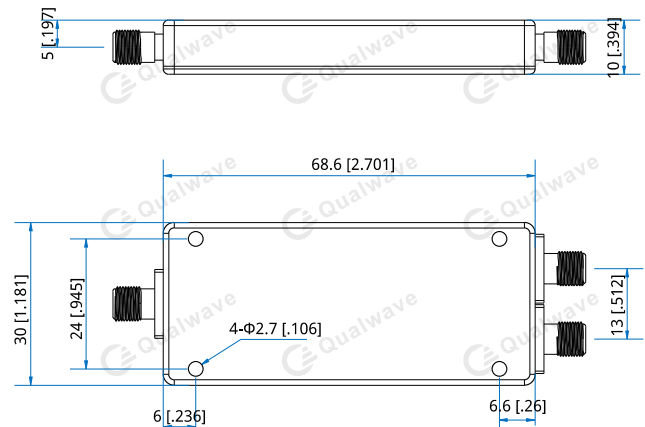

Unit: mm [in]



Tolerance: ±0.5mm [±0.02in]

How To Order

QPD2-1000-18000-20-S

Customization is available upon request.

Typical Performance Curves

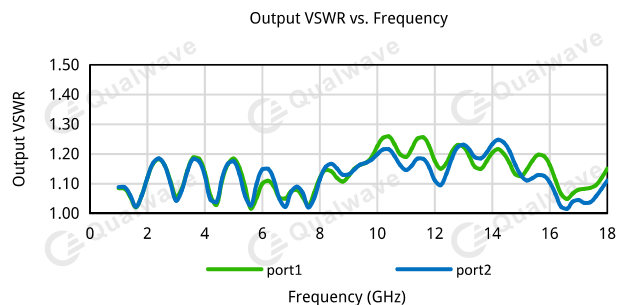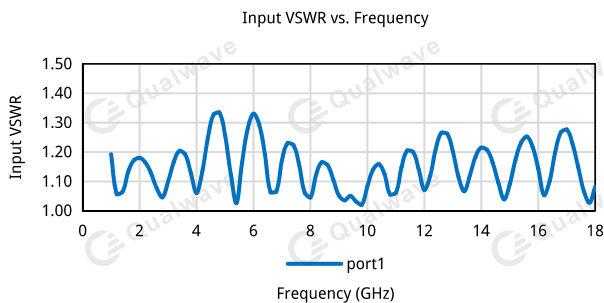

2-Way Power Divider/Combiner

