

QWCK-62

WR-62, 11.9~18GHz


Features:
 * Broad Band
 * Low VSWR

Applications:
 * Calibration
 * Laboratory Test

Components

Part Number	Frequency (GHz)	VSWR (Max.)	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
QWCA-62-SF-R-1	11.9~18	1.2	Waveguide to coax adapter, WR-62 (BJ140) to SMA(f), right angle, FBP140	Aluminium	Conductive oxidation	Ash paint	2	Outline A
QWT62-5-A-1	11.9~18	1.03	Low power waveguide termination, WR-62 (BJ140), 5W, FBP140	Aluminium	Conductive oxidation	Sea gray	1	Outline B
QWS62-A-1	11.9~18	-	Waveguide short, WR-62 (BJ140), 5mm, FBP140	Aluminium	-	-	1	Outline D
QWSS62-5-A-1	11.9~18	-	1/4λ Waveguide straight section, WR-62 (BJ140), 5mm, FBP140	Aluminium	-	-	1	Outline C
Storage Box	Aluminum Alloy						1	-
Screw							1 set	-

Outline Drawings

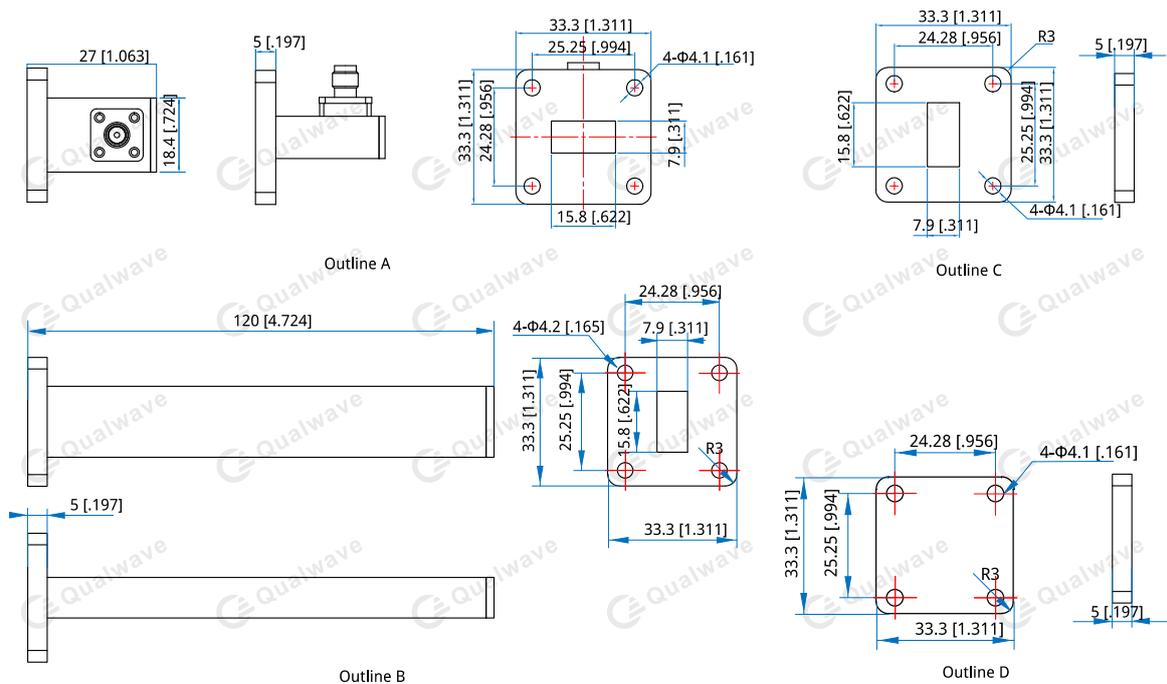

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Environmental

Operating Temperature: -40~+85°C

Non-operating Temperature: -55~+150°C

How To Order**QWCK-62** All the 6 components in one box.