

## QDDC-0.8-30-K5-50-NS

0.8~30MHz, 500W, 50dB

**Features:**

\* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

---

**Electrical**

Frequency:	0.8~30MHz
Insertion Loss:	0.1dB max.
Flatness:	±0.5dB max.
Coupling:	50±1dB
Directivity:	30dB min.
VSWR:	1.1 max.
Average Power:	500W

---

**Mechanical**

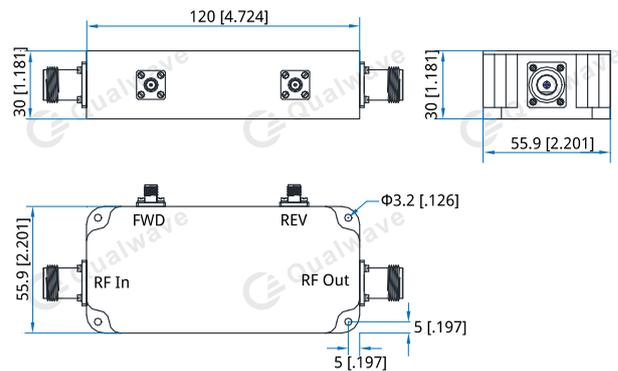
Size*1:	120*55.9*30mm 4.724*2.201*1.181in
RF Connectors:	N Female
Coupling Connectors:	SMA female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

---

**Environmental**

Operating Temperature:	-40~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

**QDDC-0.8-30-K5-50-NS**

Customization is available upon request.