

QDDC-80-1000-3K5-50-A1N

80~1000MHz, 3500W, 50dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	80~1000MHz
Insertion Loss:	0.35dB max.
Coupling:	50±2dB
Coupling Flatness:	±1.5dB max.
Directivity:	15dB min.
VSWR (Mainline):	1.3 max.
Average Power:	3500W max.

Mechanical

Size ^{*1} :	130*110*85.5mm 5.118*4.331*3.366in
RF Connectors:	1-5/8" (IF70) Female
Coupling Connectors:	N Female
Mounting:	4-Φ8mm through-hole

[1] Exclude connectors and flanges.

Outline Drawings

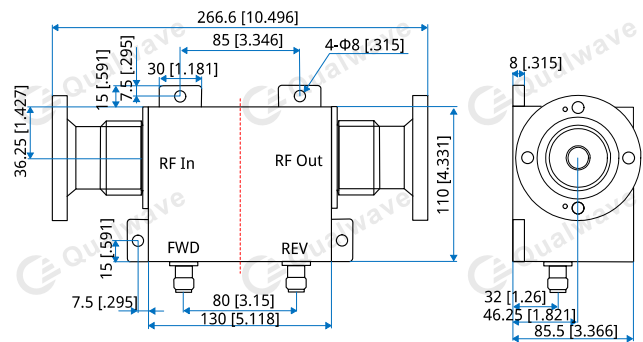

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-80-1000-3K5-50-A1N

Customization is available upon request.