

QPD3-800-2500-K2-7

3-Way, 0.8~2.5GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

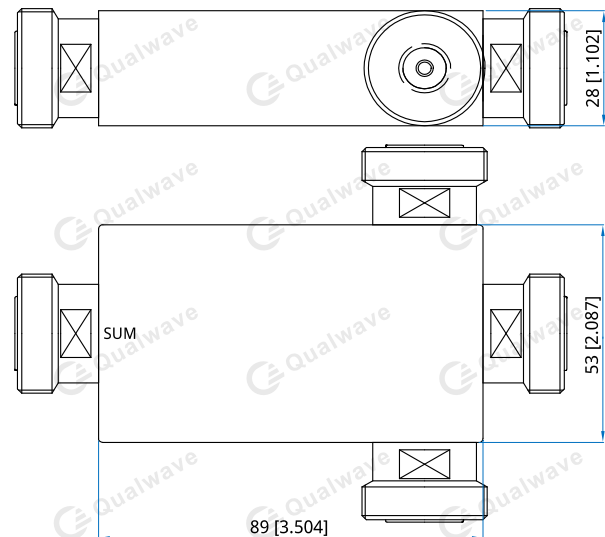
Frequency:	0.8~2.5GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	4° max.
Impedance:	50Ω
Power @SUM Port:	200W max. as divider

Mechanical

Size:	89*53*28mm 3.504*2.087*1.102in
-------	-----------------------------------

Environmental

Operation Temperature:	-30~+70°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD3-800-2500-K2-7

Customization is available upon request.