

QPD32-700-2700-30-S

32-Way, 0.7~2.7GHz, 30W, SMA

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.7~2.7GHz
Insertion Loss:	1.8dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.25 max.
Isolation:	18dB min.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±8°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical


Size ^{*1} :	430*110*14mm 16.929*4.331*0.551in
Connectors:	SMA Female
Mounting:	6-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

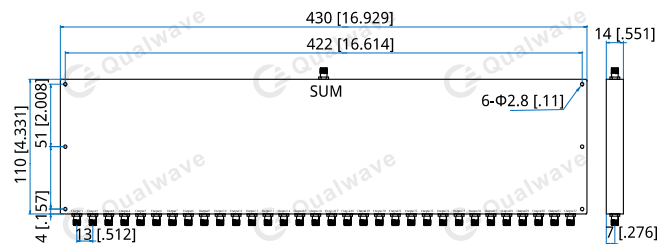

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD32-700-2700-30-S

Customization is available upon request.