

QRC16-2000-4000-K45-N

16-Way, 2~4GHz, 450W

Features:

- * Small Size
- * Low Insertion Loss
- * High Reliability

Applications:

- * Radar System
- * Communication System
- * Power Amplifier System
- * Test System

Electrical

Frequency:	2~4GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.6 max.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±8° max.* ¹ ±5° max.* ²
Impedance:	50Ω
Power @SUM Port:	450W as combiner
Peak Power:	1500W

[1] Between ports of the same product

[2] Corresponding ports between individuals

Mechanical


Connectors: N Female

How To Order

QRC16-2000-4000-K45-N

Customization is available upon request.

Outline Drawings

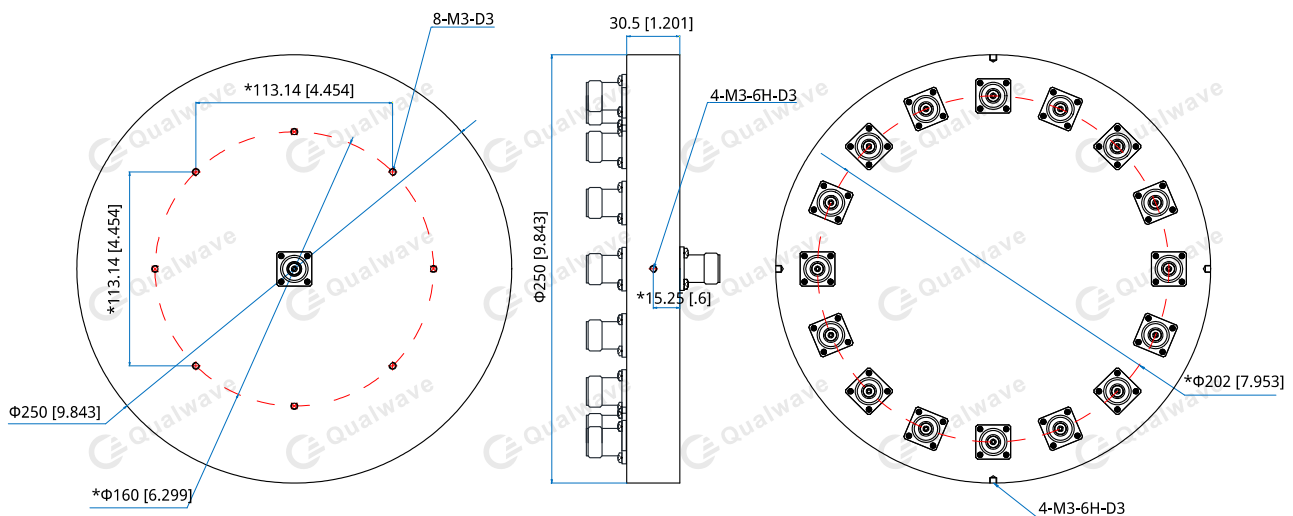

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

*: To ensure the size of the design