

QRC20-17300-18100-3K-51S

20-Way, 17.3~18.1GHz, 3000W

Features:

- * Small Size
- * Low Insertion Loss
- * High Reliability

Applications:

- * Radar System
- * Communication System
- * Power Amplifier System
- * Test System

Electrical

Frequency:	17.3~18.1GHz
Insertion Loss:	0.9dB max.
Input VSWR:	1.6 max.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±8° max.
Impedance:	50Ω
Power @SUM Port:	3000W as combiner

Mechanical


Connectors: WR-51 (BJ180), SMA Female

How To Order

QRC20-17300-18100-3K-51S

Customization is available upon request.

Outline Drawings

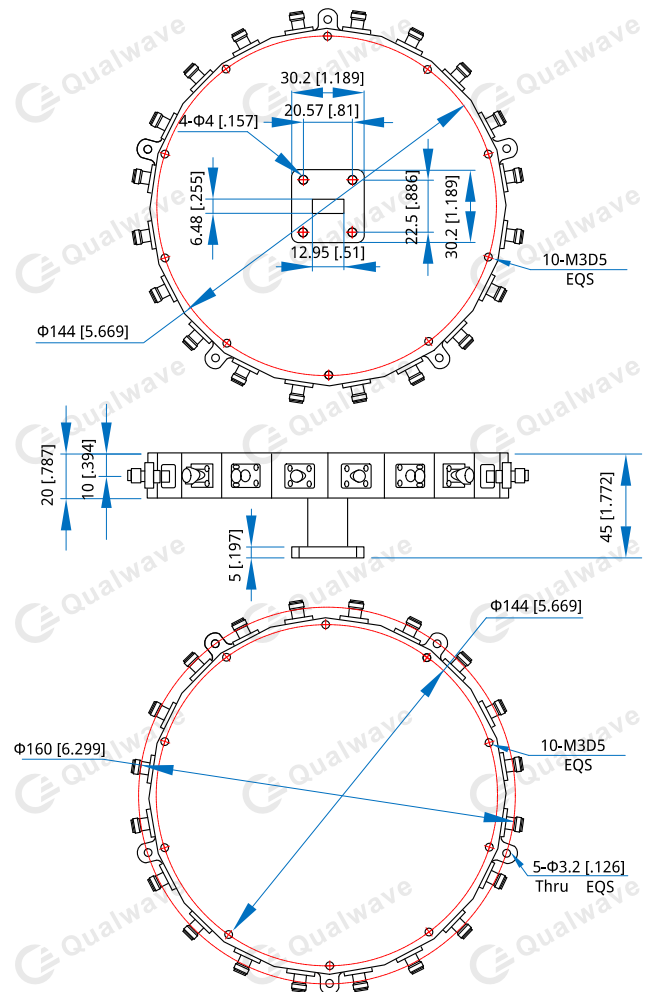

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]