

QPD4-2000-67000-12-V

4-Way, 2~67GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	2~67GHz
Insertion Loss:	6.8dB max.
VSWR:	1.8 max.
Isolation:	16dB min.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±10° max.
Impedance:	50Ω
Power @SUM Port:	12W as divider 1W as combiner

Mechanical


Size ^{*1} :	79.2*51.6*12.7mm 3.118*2.031*0.5in
Connectors:	1.85mm Female
Mounting:	2-Φ3.6mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

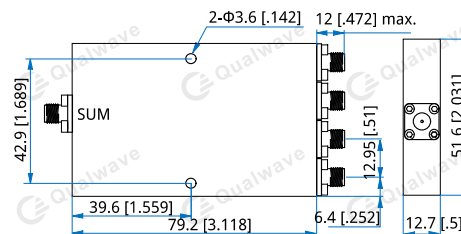

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD4-2000-67000-12-V

Customization is available upon request.