

QPD4-3400-4800-30-NS

4-Way, 3.4~4.8GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	3.4~4.8GHz
Insertion Loss:	0.8dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	25dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical


Size ^{*1} :	50*105*20mm 1.969*4.134*0.787in
Input Connector:	SMA Female
Output Connector:	N Female
Mounting:	4-M3 through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

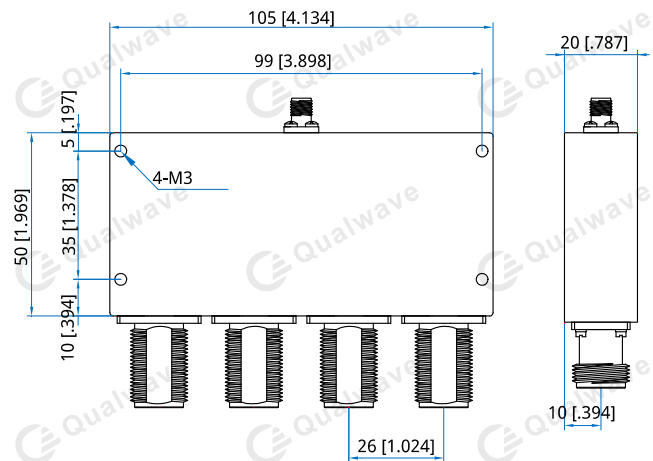

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD4-3400-4800-30-NS

Customization is available upon request.