

QPD4-380-460-K1-7

4-Way, 0.38~0.46GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.38~0.46GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	100W max. as divider
IP Grade:	IP67

Mechanical


Size ^{*1} :	150*118*30mm 5.906*4.646*1.181in
Connectors:	7/16 DIN Female

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+70°C
------------------------	-----------

Outline Drawings

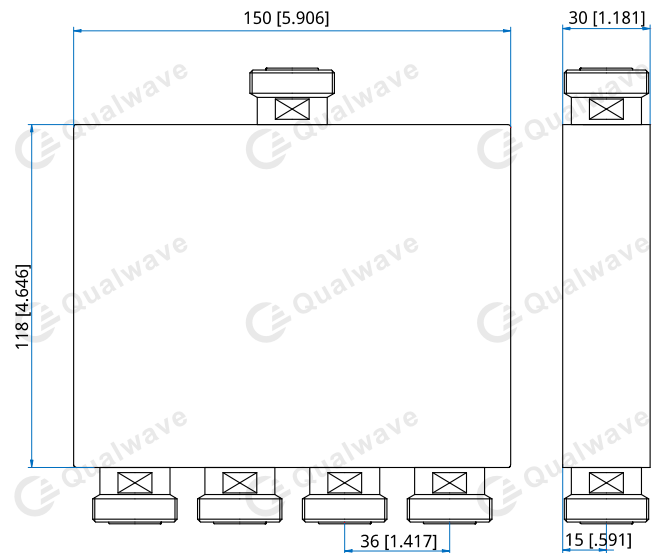

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD4-380-460-K1-7

Customization is available upon request.