

QPD6-0-4000-2-N

6-Way, DC~4GHz, 2W

Features:

- * Broadband
- * Low Insertion Loss
- * High Power

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	DC~4GHz
Insertion Loss:	16.5±1.5dB max.
VSWR:	1.4 max.
Isolation:	15dB min.
Amplitude Balance:	±1dB
Impedance:	50Ω
Power @SUM Port:	2W max. as divider

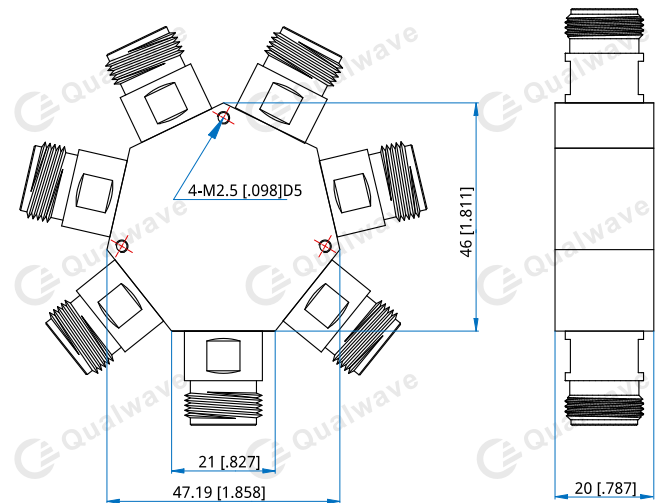
Mechanical

Size ^{*1} :	46*47.19*20mm 1.811*1.858*0.787in
Connectors:	N Female
Mounting:	4-M2.5, depth 5mm

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD6-0-4000-2-N

Customization is available upon request.