

QPD8-18000-40000-30-K

8-Way, 18~40GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	18~40GHz
Insertion Loss:	3.6dB max. (Excluding theoretical loss 9dB)
Input VSWR:	1.7 max.
Output VSWR:	1.6 max.
Isolation:	15dB min.
Amplitude Balance:	±0.6dB
Phase Balance:	±6°
Impedance:	50Ω
Power @SUM Port:	30W as divider 1W max. as combiner

Mechanical


Size ^{*1} :	104*40*10mm 4.094*1.575*0.394in
Weight:	138g
Connectors:	2.92mm Female (Passivated stainless steel)
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

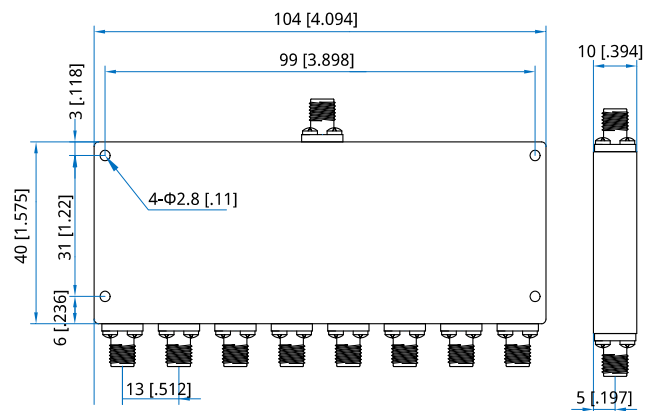

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD8-18000-40000-30-K

Customization is available upon request.