

QHC9-2000-6000-30-S

2~6GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~6GHz
Insertion Loss:	0.4dB max.
VSWR:	1.4 max.
Isolation:	18dB min.
Amplitude Balance:	±0.7dB max.
Phase Balance:	90±5°
Average Power:	30W
Impedance:	50Ω

Mechanical

Size ^{*1} :	53*22*11mm 2.087*0.866*0.433in
RF Connectors:	SMA Female
Mounting:	2-Φ2.3mm through hole

[1] Exclude connectors.

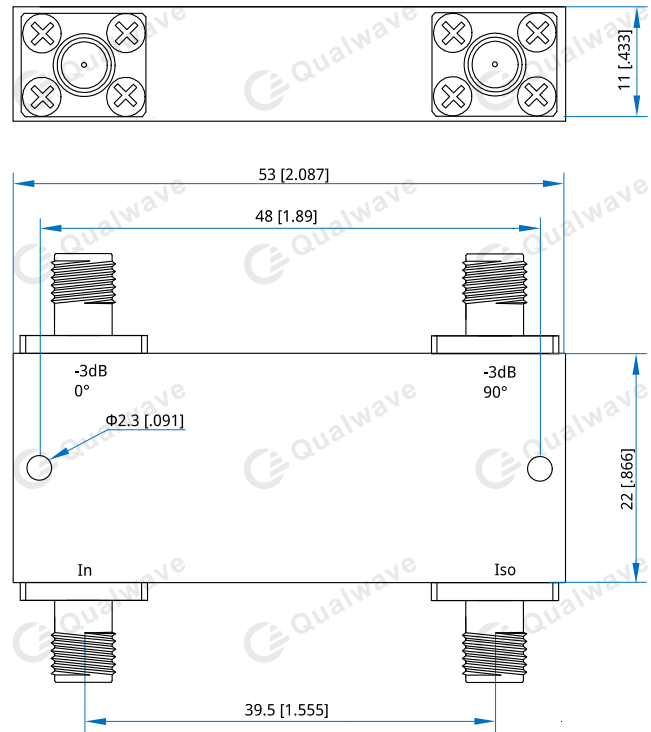
Environmental

Operating temperature:	-40~+85°C
------------------------	-----------

How To Order

QHC9-2000-6000-30-S

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]