

QHC9-50-250-1-S

50~250MHz, 1W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

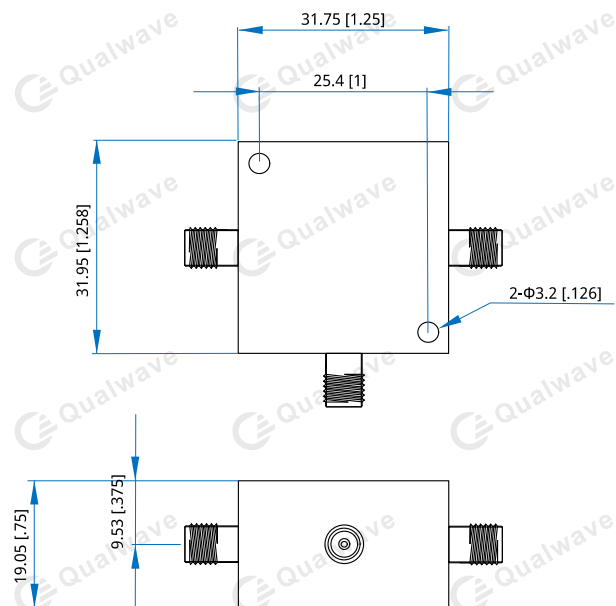
Electrical

Frequency:	50~250MHz
Insertion Loss:	1.6dB max.
Isolation:	15dB min.
VSWR:	1.5 max.
Amplitude Balance:	±0.5dB
Phase Balance:	±6°
Average Power:	1W max.
Impedance:	50Ω

Mechanical

Size ^{*1} :	31.75*31.95*19.05mm 1.25*1.258*0.75in
RF Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QHC9-50-250-1-S

Customization is available upon request.