

QHC9-80-120-10-S

0.08~0.12GHz, 10W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.08~0.12GHz
Insertion Loss:	1dB max.
VSWR:	1.4 max.
Isolation:	20dB min.
Amplitude Balance:	±0.4dB max.
Phase Balance:	90±2°
Average Power:	10W
Impedance:	50Ω

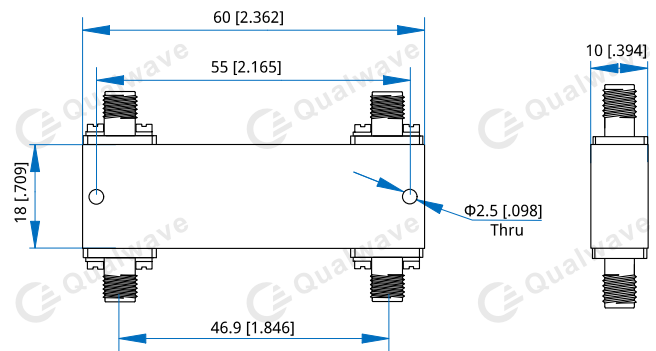
Mechanical

Size ^{*1} :	60*18*10mm 2.362*0.709*0.394in
RF Connectors:	SMA Female
Mounting:	2-Φ2.5mm through hole

[1] Exclude connectors.

Environmental

Operating temperature:	-40~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QHC9-80-120-10-S

Customization is available upon request.