

QHC9-800-4500-K125-S

0.8~4.5GHz, 125W

Features:
 * Broadband
 * High Power
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.8~4.5GHz
Insertion Loss:	1.8dB max.
Isolation:	12dB min.
VSWR:	1.7 max.
Amplitude Balance:	±1.8dB max.
Phase Balance:	±15° max.
Average Power:	125W

Mechanical


Size*1:	76.3*39.5*15mm 3.004*1.555*0.591in
RF Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

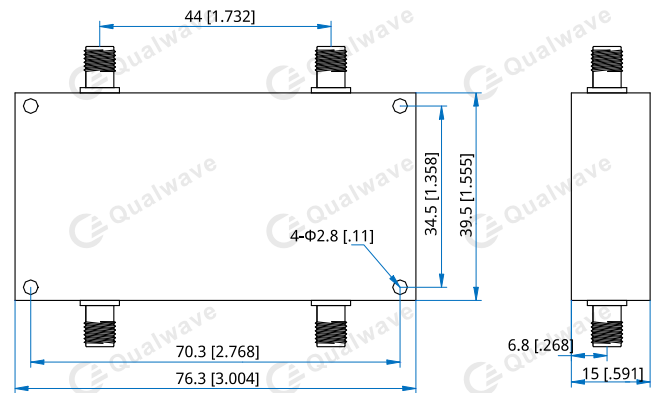

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QHC9-800-4500-K125-S

Customization is available upon request.