

QBF-11900-12100-60

11.9~12.1GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	11.9~12.1GHz
Insertion Loss:	3dB max.
Stopband Attenuation:	60dB@11.2~12.8GHz min.
VSWR:	1.5 max.

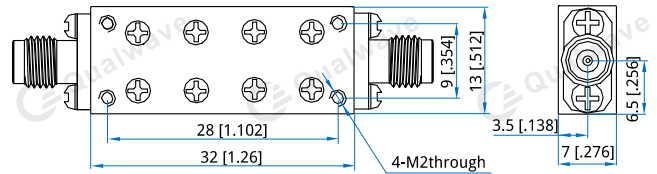
Mechanical

Size ^{*1} :	32*13*7mm 1.26*0.512*0.276in
Mounting:	4-M2mm through-hole
RF Connectors:	Φ0.38 Pin SMA Female (Removable)

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]

How To Order

QBF-11900-12100-60

Customization is available upon request.