

QBF-12600-18000-50

12.6~18GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	12.6~18GHz
Passband Ripple:	1dB max.
Insertion Loss:	1dB max.
Stopband Attenuation:	50dB@DC~10.2GHz min. 50dB@20.7~22GHz min.
VSWR:	1.9 max.
Power:	1W min.

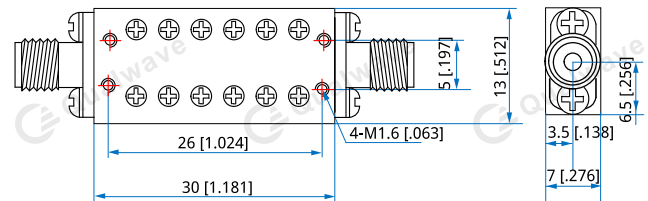
Mechanical

Size ^{*1} :	30*13*7mm 1.181*0.512*0.276in
RF Connectors:	SMA female
Mounting:	4-M1.6mm through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]

How To Order

QBF-12600-18000-50

Customization is available upon request.