

QBF-1390-1410-80

High Stopband Rejection

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	1.39~1.41GHz
Passband Ripple:	1dB max.
Insertion Loss at CF:	2dB max.
VSWR:	1.3dB max.
Stopband Attenuation:	80dB@1.35GHz min. 80dB@1.47GHz min.

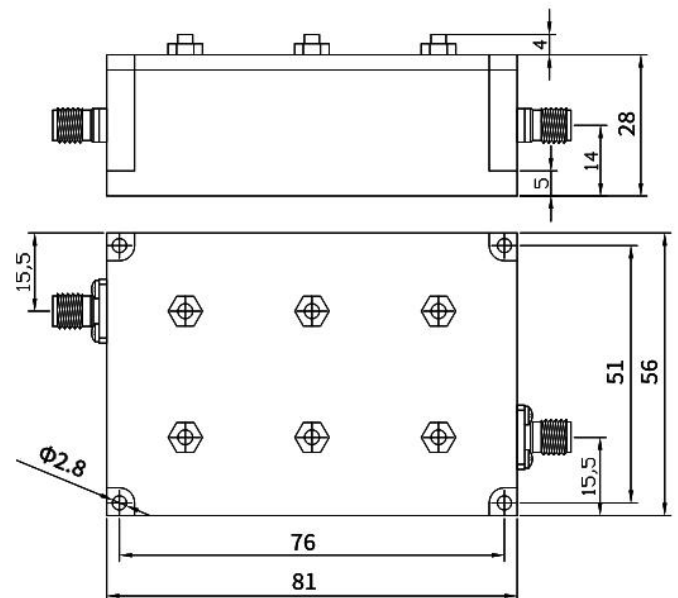
Mechanical

Size*1:	81*56*28mm 3.189*2.205*1.102in
RF Connectors:	SMA Female
Mounting:	4* Φ 2.8 Through-hole

[1] Exclude connectors.

Environmental

Working Temperature:	-40~+75°C
Storage Temperature:	-55~+85°C

Outline Drawings


Unit: mm
Tolerance: \pm 0.2mm

How To Order

QBF-1390-1410-80

Customization is available upon request.