

QBF-18000-26500-60

18GHz~26.5GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

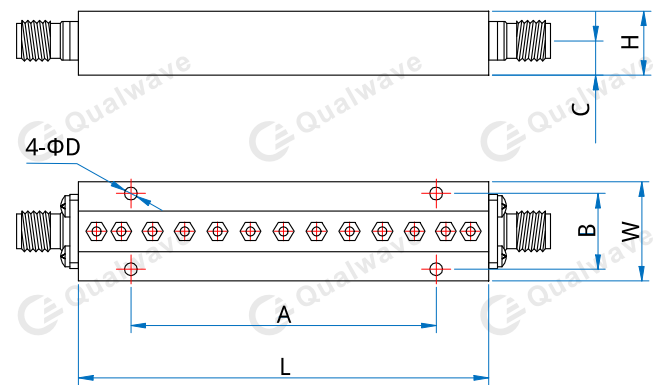
Passband:	18~26.5GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.8 max.
Stopband Attenuation:	60dBc@DC~15GHz min. 60dBc@29.5~37GHz min.

Mechanical

RF Connectors:	2.92mm Female
Mounting:	4* Φ 2.2mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Size	L	W	H	A	B	C	D
mm	59.5	16	11	41.5	11	6.3	2.2
in	2.343	0.630	0.433	1.634	0.433	0.248	0.087

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

[QBF-18000-26500-60](#)

Customization is available upon request.