

QBF-2000-3000-50

2~3GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2~3GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	50dB@DC~1.78GHz min. 50dB@3.22~5GHz min.
Impedance:	50Ω
Average Power:	2W max.

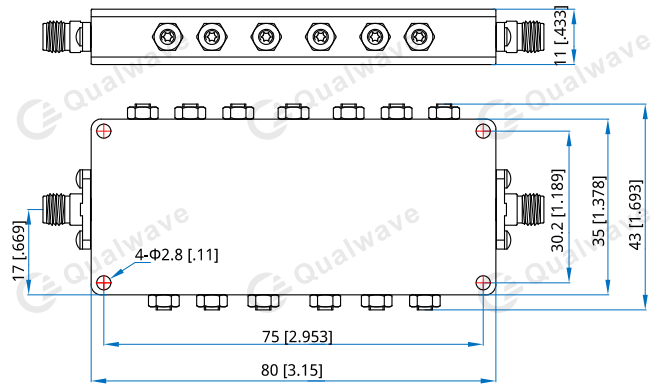
Mechanical

Size ^{*1} :	80*43*11mm 3.15*1.693*0.433in
Connectors:	SMA female
Mounting:	4-Φ2.8mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-2000-3000-50

Customization is available upon request.