

# QBF-2000-4000-60

2~4GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation



**Electrical**

Passband:	2~4GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.6 max.
Stopband Attenuation:	60dBc@1.5GHz min. 60dBc@4.5GHz min.


**Mechanical**

RF Connectors:	SMA Female
Mounting:	4*Φ2mm through-hole

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**

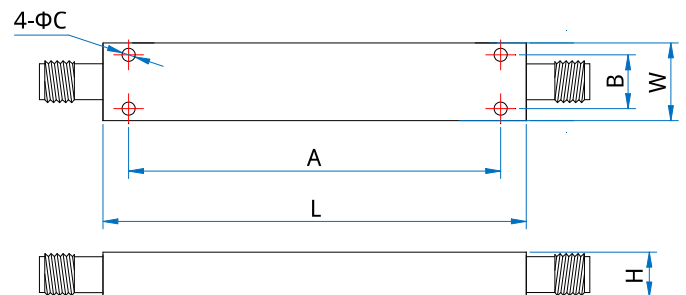

Size	L	W	H	A	B	C
mm	51	11	10	48	8	2
in	2.008	0.433	0.394	1.89	0.315	0.079

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-2000-4000-60**

Customization is available upon request.