

QBF-2200-2400-30

2.2~2.4GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	2.2~2.4GHz
-1dB Passband Width:	200MHz min.
-3dB Passband Width:	260MHz min.(2170 ~ 2430MHz)
Passband Insertion Loss:	1dB max.
Stopband Attenuation:	40dB@DC~2.1GHz min. 30dB@2.5~4.5GHz min.
VSWR:	1.5 max.

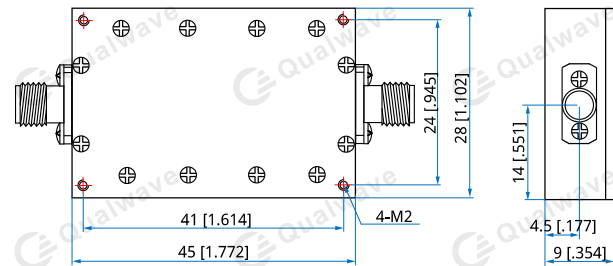
Mechanical

Size ^{*1} :	45*28*9mm 1.772*1.102*0.354in
RF Connectors:	SMA female
Mounting:	4-M2 depth

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-2200-2400-30

Customization is available upon request.