

QBF-2400-2482-30

2.4~2.482GHz, 30dB

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical

Frequency:	2.4~2.482GHz
Passband Insertion Loss:	1.5dB max.
Passband Ripple:	1dB max.
Stopband Attenuation:	30dB@DC~2386MHz, 2496~5000MHz min.
VSWR:	1.25 max.
Average Power:	20W max.
Impedance:	50Ω

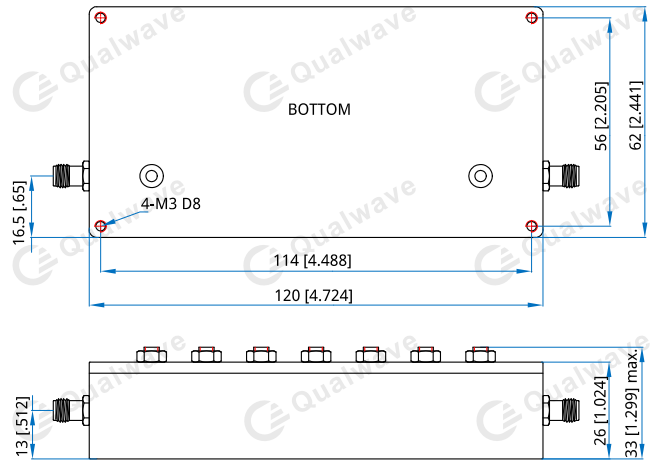
Mechanical

Size ^{*1} :	120*62*26mm 4.724*2.441*1.024in
RF Connectors:	SMA Female
Mounting:	4-M3 depth 8mm

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings


Unit: mm [in]
 Tolerance: ±0.5mm [±0.2in]

How To Order

QBF-2400-2482-30

Customization is available upon request.