

QBF-25500-27000-30

25.5~27GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	25.5~27GHz
Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	70dB @10~23.83GHz min. 30dB @25GHz min. 66dB @28.67GHz min. 60dB @29~45GHz min.
Group Delay Variation:	2ns max.

Mechanical


Size ^{*1} :	52*15*6mm 2.047*0.591*0.236in
RF Connectors:	2.92mm Female SMA Female
Mounting:	4-Φ3mm Through Hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+55°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

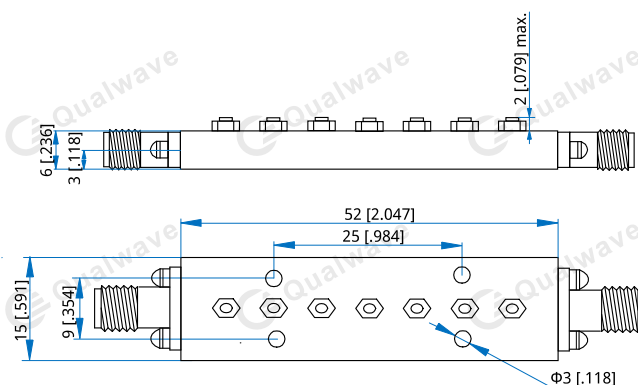

Unit: mm

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-25500-27000-30

Customization is available upon request.