

QBF-2573.5-2626.5-40

2.5735~2.6265GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2.5735~2.6265GHz
Passband Insertion Loss:	0.8dB max.
Passband Ripple:	±0.4dB max.
VSWR:	1.3 max.
Stopband Attenuation:	40dB@2.5435GHz min. 40dB@2.6565GHz min.
Power:	10W

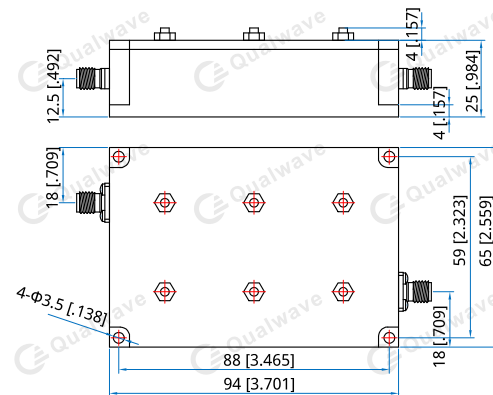
Mechanical

Size ^{*1} :	94*65*25mm 3.701*2.559*0.984in
Connectors:	SMA Female
Mounting:	4-Φ3.5mm through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-2573.5-2626.5-40

Customization is available upon request.