

# QBF-26000-28000-40

26~28GHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	26~28GHz
1dB Band Width:	2GHz min.
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband Attenuation:	60dB@DC~23GHz min.
	40dB@29~31GHz min.
	60dB@31~45GHz min.

**Mechanical**

Size <sup>*1</sup> :	47.4*16*6mm
	1.866*0.63*0.236in
Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

**Environmental**


Operating Temperature:	-40~+55°C
Non-operating Temperature:	-55~+85°C

**How To Order**

**QBF-26000-28000-40**

Customization is available upon request.

**Outline Drawings**

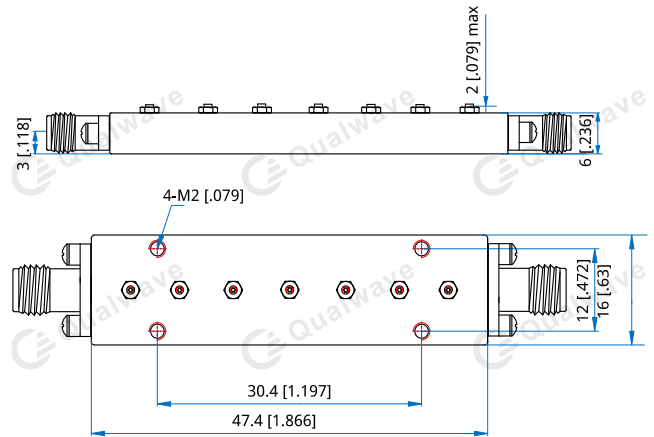

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]