

QBF-2700-3300-60

2.7~3.3GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	2.7~3.3GHz
Passband Insertion Loss:	1.8dB max.
Passband Ripple:	1dB max.
Stopband Attenuation:	60dB@DC~2.6GHz min. 60dB@3.4~7GHz min.
VSWR:	1.22 max.
Impedance:	50Ω
Average Power:	20W max.

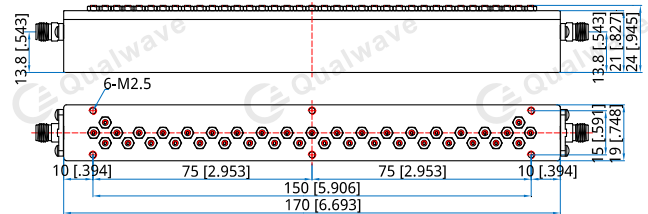
Mechanical

Size ^{*1} :	170*19*24mm 6.693*0.748*0.945in
RF Connectors:	SMA female
Mounting:	6-M2.5 through-hole

[1] Exclude connectors.

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-2700-3300-60

Customization is available upon request.