

QBF-5925-7125-80

5.925~7.125GHz, 80dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	5.925~7.125GHz
Passband Insertion Loss:	0.9dB max.
Passband Ripple:	0.4dB max.
VSWR:	1.16 max.
Stopband Attenuation:	80dB @DC ~ 5.1GHz, 7.95 ~ 24GHz min.
Impedance:	50Ω
Average Power:	5W max.

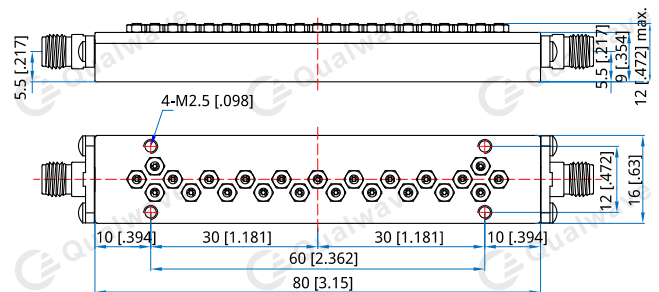
Mechanical

Size ^{*1} :	80*16*9mm 3.15*0.63*0.354in
Connectors:	SMA Female
Mounting:	4-M2.5mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QBF-5925-7125-80

Customization is available upon request.