

QBF-6800-9800-60

6.8~9.8GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	6.8~9.8GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	60dB@DC~5.23GHz min. 60dB@11.76~15GHz min.
Impedance:	50Ω
Average Power:	2W max.

Mechanical


Size ^{*1} :	45*19*7mm 1.772*0.748*0.276in
Connectors:	SMA Female
Mounting:	4-M2 through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

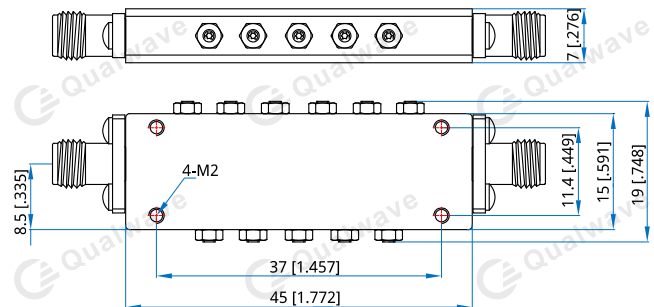

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-6800-9800-60

Customization is available upon request.