

QBF-8400-11400-50

8.4~11.4GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	8.4~11.4GHz
Passband Ripple:	1dB max.
Insertion Loss:	1dB max.
Stopband Attenuation:	50dB@DC~6.8GHz min. 50dB@13.8~18GHz min.
VSWR:	1.9 max.
Power:	1W min.

Mechanical


Size ^{*1} :	30*13*7mm 1.181*0.512*0.276in
RF Connectors:	SMA female
Mounting:	4-M1.6mm through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

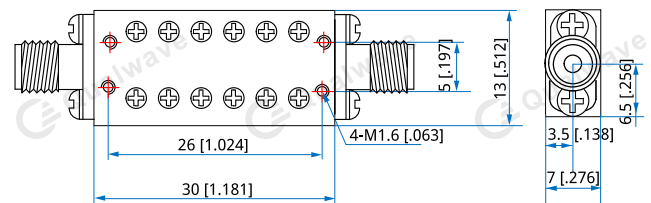

Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]

How To Order

QBF-8400-11400-50

Customization is available upon request.