

# QBF-923-2466-20

0.923~2.466GHz, 20dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	0.923~2.466GHz
Passband Insertion Loss:	2dB max.
Passband Ripple:	1dB max.
VSWR:	1.7 max.
Stopband Attenuation:	50dB@DC~0.72Hz, 3~5GHz min. 20dB@5~7GHz min.
Impedance:	50Ω
Average Power:	2W max.

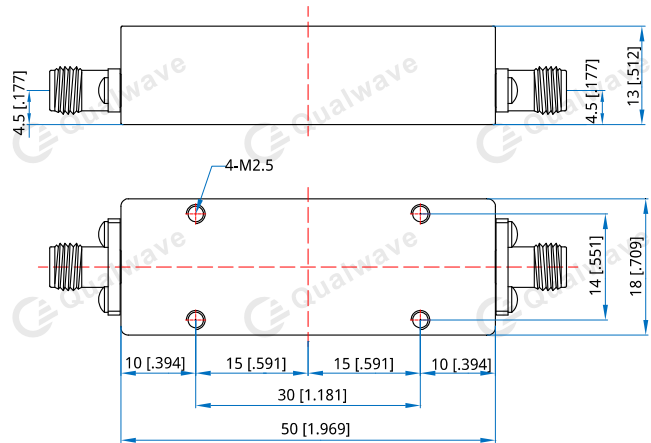
**Mechanical**

Size <sup>*1</sup> :	50*18*13mm 1.969*0.709*0.512in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

**QBF-923-2466-20**

Customization is available upon request.