

# QBF-925-935-40

## 0.925~0.935GHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	0.925~0.935GHz
Passband Insertion Loss:	2.0dB max.
Passband Ripple:	0.6dB max.
VSWR:	1.15 min.
Stopband Attenuation:	50dB min.@ DC ~ 912MHz &948 ~ 2500MHz 40dB min. @ 912 ~ 915MHz &945 ~ 948MHz
Impedance:	50Ω
Average Power:	50W max.

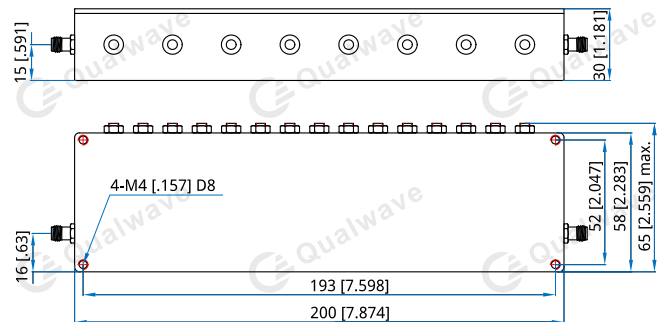
**Mechanical**

Size <sup>*1</sup> :	200*58*30mm 7.874*2.283*1.181in
Connectors:	SMA female
Mounting:	4-M4 depth8

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-925-935-40**

Customization is available upon request.