

QBF-935-945-40

0.935~0.945GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	0.935~0.945GHz
Passband Insertion Loss:	2.0dB max.
Passband Ripple:	0.6dB max.
VSWR:	1.15 min.
Stopband Attenuation:	50dB min.@DC ~ 922MHz & 958 ~ 2500MHz 40dB min. @ 922 ~ 925MHz & 955 ~ 958MHz
Impedance:	50Ω
Average Power:	50W max.

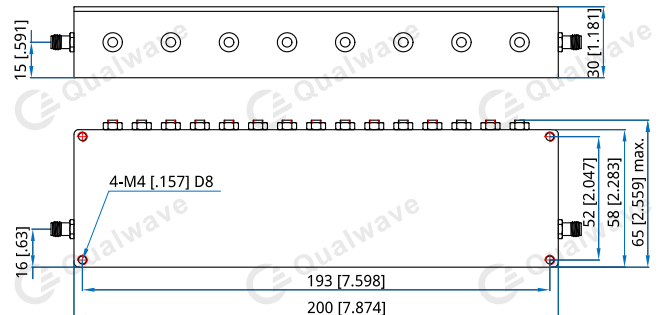
Mechanical

Size ^{*1} :	200*58*30mm 7.874*2.283*1.181in
Connectors:	SMA female
Mounting:	4-M4 depth8

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-935-945-40

Customization is available upon request.