

QBF-945-960-50

0.945~0.96GHz, 50dB

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Receivers
 * Instrumentation

Electrical

Passband:	0.945~0.96GHz
Passband Insertion Loss:	2.0dB max.
Passband Ripple:	1.0dB max.
VSWR:	1.15 min.
Stopband Attenuation:	50dB @ DC ~ 935MHz min. 50dB @ 970 ~ 2500MHz min.
Impedance:	50Ω
Average Power:	50W max.

Mechanical


Size ^{*1} :	200*58*30mm 7.874*2.283*1.181in
Connectors:	SMA female
Mounting:	4-M4 depth8

[1] Exclude connectors.

Environmental

Temperature: -30~+70°C

Outline Drawings

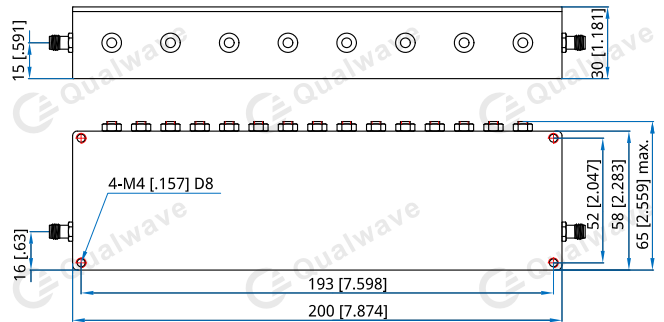

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-945-960-50

Customization is available upon request.