

QRF-1710-1785-60

1.71~1.785GHz, 60dB

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Receivers
 * Instrumentation

Electrical

Passband:	DC~1.685GHz 1.81~5GHz
Passband Insertion Loss:	2dB max. (at the corner: 2.5dB max.)
Passband VSWR:	1.5 max.
Stopband:	1.71~1.785GHz
Stopband Attenuation:	60dB min.
Average Power:	20W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	245*47*22mm 9.646*1.85*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings

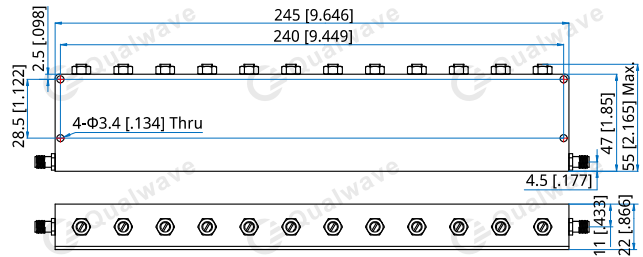

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QRF-1710-1785-60

Customization is available upon request.